

### Professional Camera Light Small, Powerful & Versatile

The Frezzi ProLight is the new standard in professional camera lights. Based on the industry's leading camera light, the Frezzi Mini-Fill, it retains all of the renowned features and adds today's must needed capabilities.



Amazing LED  
75W Output

### New Features

#### Quick Release



The ProLight can be easily detached with the quick release feature. The low-profile base stays neatly wired to the camera body. The camera now fits neatly in camera bag.

#### Articulating Arm



ProLight's rugged aluminum articulating arm allows positioning at any desired height or forward location to avoid lens hood shadow.

#### USB Charge Port



The ProLight is the only camera light with a built in USB charging port that can charge any USB powered device from your camera battery.


#### Pass-Thru PT



Allows connection of wireless or other broadcast device to the same Power Tap port as the ProLight.

### Trusted Frezzi Features

- Output 5X Typical LED camera lights
- Full Spectrum 90+CRI
- Low Power Draw 8W
- Single Shadow
- Rugged all aluminum
- Fully weatherproof
- Compact Design/  
Light weight 8oz.
- New Rugged Combo-Barn  
Door Filter Accessory
- Advanced dimmer control  
without color shift
- Upgradeable lamp  
change. Future-proof and  
hybrid accepts LED and  
Tungsten lamps

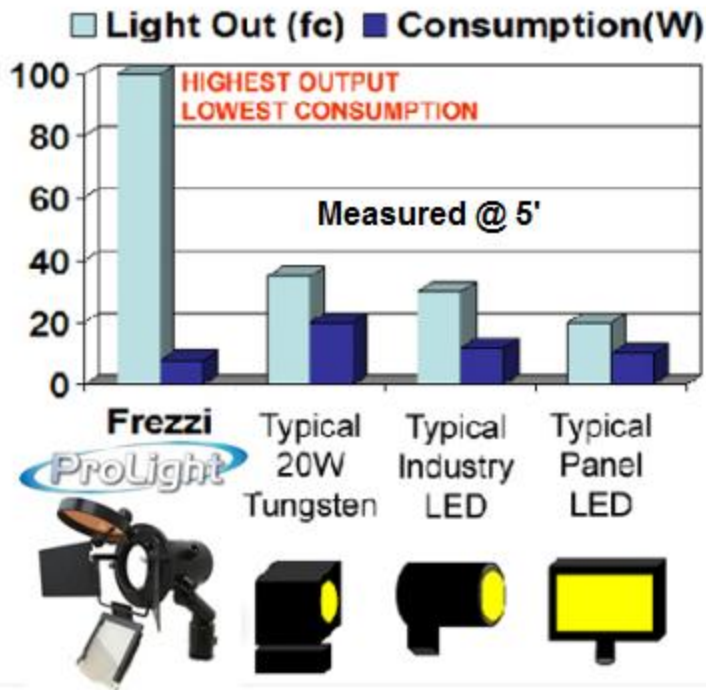

The Frezzi ProLight is machined from solid aircraft-grade aluminum that will provide years of reliable service.

Instant diffusion and accurate color change with flip down filters, eliminates imprecise dial adjustments while maintaining highest output and lowest power consumption.



Always be fully charged in the field with the built in USB Charging Port

#### Ordering Information

| Item  | Model | Description   |
|-------|-------|---|
| 91726 | PLCK  | COOL LED PROLIGHT 5000K LEDCEX with Dual PT connector |
| 91727 | PLWK  | WARM LED PROLIGHT 3200K LEDWEX with Dual PT connector |
| 91728 | PLTK  | 20W TUNGSTEN PROLIGHT 20W lamp with Dual PT connector |

#### Options and Accessories


|       |      |  |
|-------|------|--|
| 96216 | PLDF | Combo accessory with 5000K to 3000K color changer, diffusion and 2 leaf BD |
| 96217 | PLAF | Combo accessory with 3000K to 5000K color changer, diffusion and 2 leaf BD |

#### Specifications

ProLight with 5000K LED75

|              |                    |
|--------------|--------------------|
| Light Output | 100 ft-cd @ 5 feet |
| Beam Width   | 30 degrees         |
| Lamp Life    | 25K Hours          |
| Camera Mount | Cold shoe          |
| Tilt Angle   | Full Adjustable    |
| Size         | 3.5" x 5" x 2"     |
| USB Charge   | 5V 2Amps           |
| Weight       | 8 oz.              |
| Socket Type  | MR-16              |

**Power Requirement**  
12-16VDC 2Amps Max

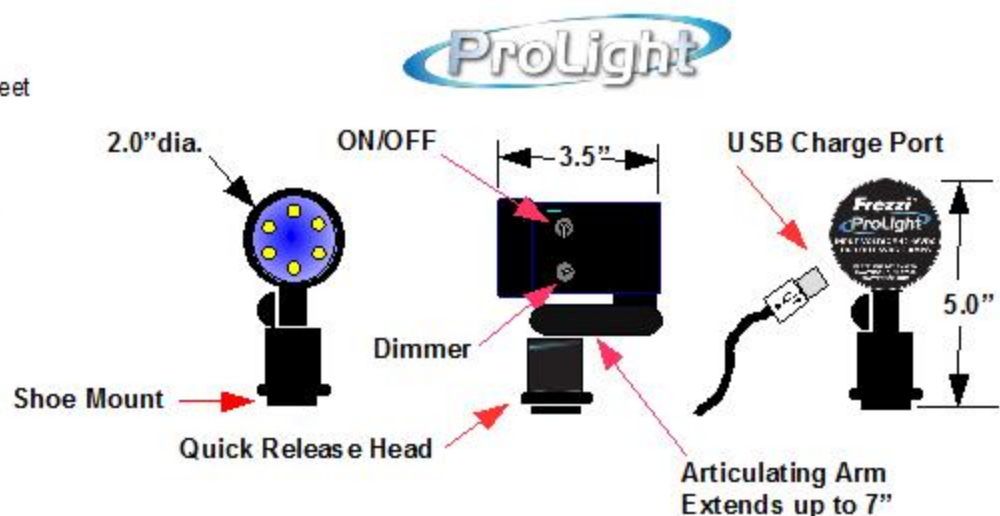

Includes Female Shoe for Cameras with 1/4-20 thread

Specifications subject to change without notice

