

## SPECIFICATIONS

Color Temperature: 3200 – 5600K

CRI ≥ 96

Luminous Flux: 1200LM

Run Time: 1 Hour 30 Minutes

LED Count: 180 Elements

Power Consumption: 12W

Battery capacity: 4400mAh


Weight: 6 ounces

Dims: L 5.9" x W 3.175" x .39"

Mount: Cold Shoe 1/4-20 threads

Charge Method: USB

### Mounting Holes Locations




Extra Side  
Mounting Hole




### In The Box



Hard-Case

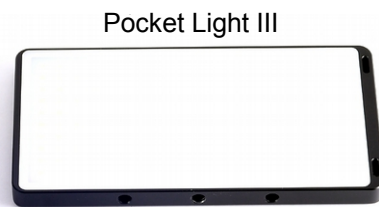

Pocket Light III

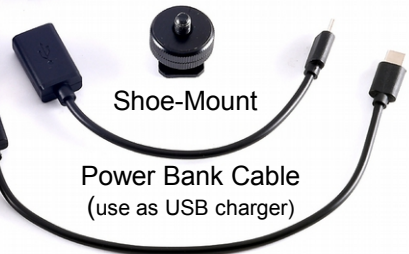

Shoe-Mount

Power Bank Cable  
(use as USB charger)

Charge Cable

### Questions?

Call Tech Support (973) 427-1160

8-5pm EST M-F

email [support@frezzi.com](mailto:support@frezzi.com)

This product has a warranty of 1 year from the date of purchase against defects in parts and labor.

# Frezzi®

## PocketLight III

## Quick Start Guide



[www.frezzi.com](http://www.frezzi.com)


PocketLight III Manual R1


7 VALLEY STREET  
HAWTHORNE, NJ 07506 USA  
HTTP://WWW.FREZZI.COM  
E-MAIL INFO@FREZZI.COM  
PHONE: (973) 427-1160  
FAX: (973) 427-0934


**READ MANUAL PRIOR TO USE**

# Operation

Power  **PRESS & HOLD 2 Seconds to TURN ON/OFF**

Mode  PRESS to change from Color to Brightness Adjust

 PRESS to Increase Color Temp/Brightness



Adjust  PRESS to Decrease Color Temp/Brightness





## Control Buttons

**LED OUTPUT OFF**  
PRESS and HOLD the MODE button for 2 seconds will make the brightness to 0%.  
The unit will remain ON. Press + button To increase brightness

**Battery Level**

Run Time →  4.0h 

Mode Indicator →  50%  5600K

Color Adjust  
Dimmer Adjust


**Display Icons**

## Charge



**Charge Input**  
Use supplied USB charge cable with a USB compatible charger.

Internal Battery can be used at a USB POWER BANK with supplied FEMALE USB Adapter.



# Mounting and Operation

## Mounting to a Camera with Shoe




Screw SHOE MOUNT into a 1/4-20 hole on the bottom of Pocket Light.

TIGHTEN Locking wheel to secure.

Slide SHOE into CAMERA and TIGHTEN locking wheel to secure.

## Smart Phone Kit Mounting OPTION




Mount Pocket Light to Phone Holder  
If using phone in "Selfie" style for a Skype interview, mount light the other way.

Mount phone by pulling open Phone Holder


Mount phone older to Tripod

Pull open Tripod Legs



Phone Holder opens to secure phone

Pull back rear leg



Rotate Light if shooting Selfie Style

Close Tripod Legs to use as Handgrip